

# evoclear<sup>®</sup>

## HIGH PERFORMANCE FILTERS

- ✓ Engineering Grade Polymer
- ✓ Ergonomic Palm Action MPV Handle
- ✓ Suitable for Sand and Glass Media
- ✓ Corrosion and UV Resistance
- ✓ Ultra Quiet Operation



**PF** SERIES



**PF SERIES MEDIA FILTERS**

**evolution<sup>®</sup>**


WATER & LIGHTING SOLUTIONS

[www.evolutionwls.com.au](http://www.evolutionwls.com.au)

The Evoclear PF Series Polymer Media Filter is a reliable and robust filter for all pool types. Constructed with an engineering grade polymer, the tank is UV resistant and backed by a 10 year warranty. With a six position multi-port valve, this dependable filter is a breeze to operate.

### The PF Series Advantage

- Engineering grade polymer tank with up to 200kPa working pressure.
- Constructed with corrosion and UV resistant materials for extreme durability.
- Premium 6 way multi-port valve for simple filter control and backwashing.
- Large "Palm-Action" handle for easy positioning of multi-port valve.
- Efficient hydraulic design allows for high flow rates and low noise operation.
- Extra-large laterals for optimum filtration.
- Stainless steel oil filled pressure gauge.
- Built in waste port sight glass for high visibility of backwash water.
- Automatic air bleed prevents the build-up of any air in the filter.
- Provided with robust ABS barrel unions for simple installation.
- Multi-port valve clamp allows for 360° orientation of valve for simple installation and service.
- Suitable for sand, glass and other media.

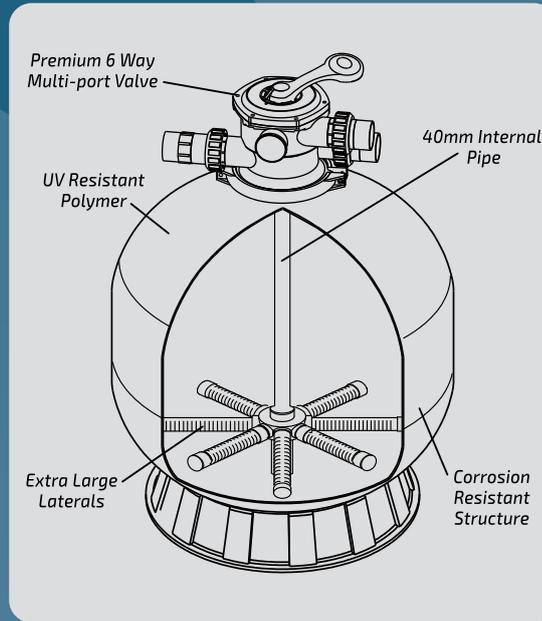

**200** KPA  
MAX. WORKING PRESSURE

**150** KPA  
BACK WASHING PRESSURE

**400** KPA  
FACTORY TESTED

Model	Diameter (mm)	Overall Height (mm)	MPV (mm)
PF21	535	845	40
PF25	635	950	40
<b>PF25P</b>	<b>627</b>	<b>950</b>	<b>40</b>
PF28	723	1092	50
PF32	800	1200	50
PF36	900	1300	50

### Warranty

- Filter Tank: 5 year full, 5 year pro-rata warranty.
- Multi-port Valve: 1 year warranty.

### Specifications

Model	Diameter		Filter Area m <sup>2</sup>	Pressure Rating		Max Flow		Media Required	
	inch	mm		Working (kPa)	Tested (kPa)	lpm	m <sup>3</sup> /h	Sand (kg)	Glass (kg)
PF21	21	535	0.22	250	400	185	11.1	85	75
PF25	25	635	0.32	250	400	260	15.6	145	120
<b>PF25P</b>	<b>25</b>	<b>627</b>	<b>0.31</b>	<b>193</b>	<b>400</b>	<b>255</b>	<b>15.3</b>	<b>145</b>	<b>120</b>
PF28	28	723	0.41	250	400	336	20.2	215	180
PF32	32	800	0.50	250	400	415	24.9	355	300
PF36	36	900	0.64	250	400	520	31.2	470	390